


Model: FGI

Standard Construction Features:

-Precision formed locked rib construction. -Available in aluminum or galvanized steel construction. -0.5 in. galvanized steel mesh birdscreens. -Heavy gauge galvanized steel support members. -Hood can be removed completely from the base or hinged open. -Units with a throat size exceeding 60 in. x 120 in. will have 12 in. galvanized bases as standard. -Recommended roof opening dimension is at least 2.5 in. larger than the damper size.

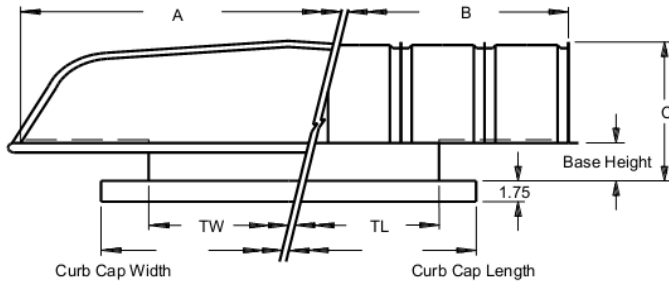

Dimensions

ID#	Tag	Qty	Model	Throat Width TW (in.)	Throat Length TL (in.)	Hood Width A (in.)	Hood Length B (in.)	Hood Height C (in.)	Curb Cap Width (in.)	Curb Cap Length (in.)	Weight (lb)	Ship Assembled
3-1	FGI22X34	1	FGI-22x34	22	34	37	60	19	28	40	96	Yes

Construction

ID#	Installation Type	Insect Screen	Base Height (in.)	Birdscreen Material	Unit Material
3-1	Non-Ducted	No	5	Galvanized	Galvanized

Accessories

ID#	Supply Filters	High Wind Rated	Florida Product Approval #	Miami-Dade NOA#	Texas Department of Insurance Product Evaluation	Curb Seal	Hood Insulation (in.)	Tie Down Points
3-1	No	No	N/A	N/A	N/A	No	None	No