

Bathroom Exhaust Fan, Wall or Ceiling Mount, Model SP-C50, 115V, 1Ph, 29-52 CFM




Low profile bathroom exhaust fan, Model SP-C features a forward-curved wheel for low sound and high efficiency. Units are ideal for residential, multifamily or hotel applications.

- Compact size for height restricted areas
- Round standard outlet for quick, easy connections
- Integral damper prevents unwanted backdrafts
- Speed controllable
- Designer grille included

Certifications AMCA Air & Sound

UL/cUL 507

Performance Characteristics

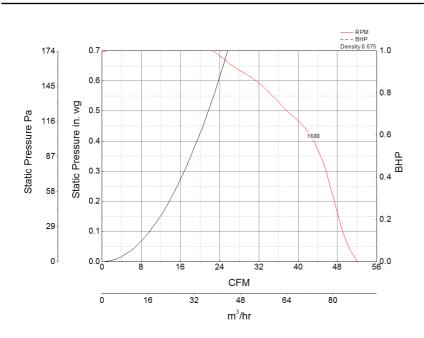

Air and Sound Performance

А	В	С	D	Е	F			
7.5 in	7.5 in	3.625 in	3 in	1.625 in	0.5 in			

Construction Features

Drive Type	Direct Drive			
Impeller Type	Centrifugal Wheel			
Impeller Material	Polypropylene			
Housing Material	Galvanized Steel			
Includes	Backdraft damper Mounting brackets			
Certifications	AMCA Air & Sound UL/cUL 507			
Speed Controllable	Yes			

Motor Information

Phase	1
Voltage	115
Watts	46

Watts	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625
46 1680		CFM	52	49	47	44	38	29	
	1680	30 1344	Sones	3	3	3	3.5	4	4



• Greenheck Fan Corporation certifies that the SP models shown herein are licensed to bear the AMCA seal.

• The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

• The SP models are not AMCA certified with 50 hertz motors.

California Residents



This product can expose you to chemicals including cadmium used in the processing of corrosion resistant metal and fasteners, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov