


LBPH Linear Bar Grille - Heavy Duty

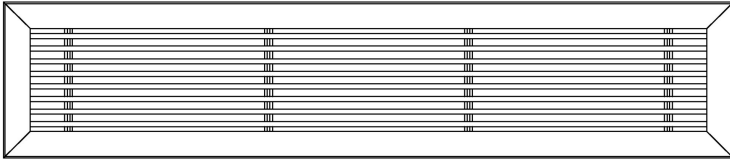

End Conditions:


XX Both Mitred Ends

Finish:

ALB Light Bronze Anodized


Core

25C 0° Deflection - 3/16" Bars - 7/16" On Center Spacing

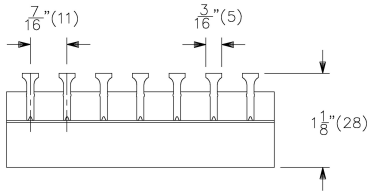


Fastening

A Countersunk Screw Holes




Border

1000 1" (25) Border

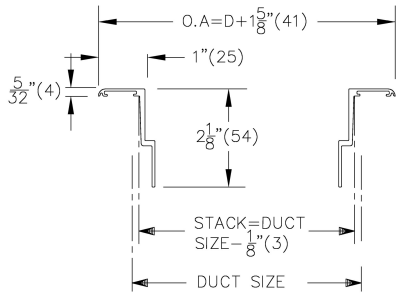

Accessories Included

VCS3

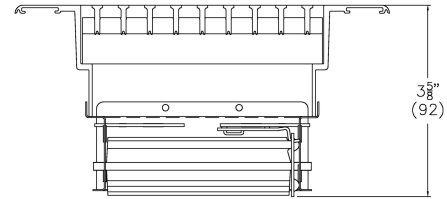

VCS3 opposed blade damper
 Min. nom. width = 2.5" (64)

Notes

- For floor application
- Extruded aluminum construction
- Sections can be joined for continuous appearance
- Screw mounting holes per factory standard
- Units wider than 12" are not recommended for floor applications. If used, additional structural support must be designed and installed by others.
- Units wider than 24" are supplied in multiple sections with mounting channel(s)

- For sidewall application
- Bars are parallel to the first dimension
- Weld build-up max. 1/16" (2) at corners
- Factory tolerance: ± 1/32" (1) per grille section
- Maximum length for one piece construction = 72"
- Removeable Core held in place with clips

PROJECT: ODD STOCK
ENGINEER:
DESCRIPTION: Heavy Duty Linear Bar Grille
 LBPH/I/72.000,30.000/2.000,6.000/SW,Floor/1000/25C/XX/3/A/ALB

SUBMITTAL NO: 258245-D
CUSTOMER:

SUBMITTAL DATE: 2/3/2021