


SUBMITTAL DATA



FABRI-FLEX TYPE 4 NON-INSULATED

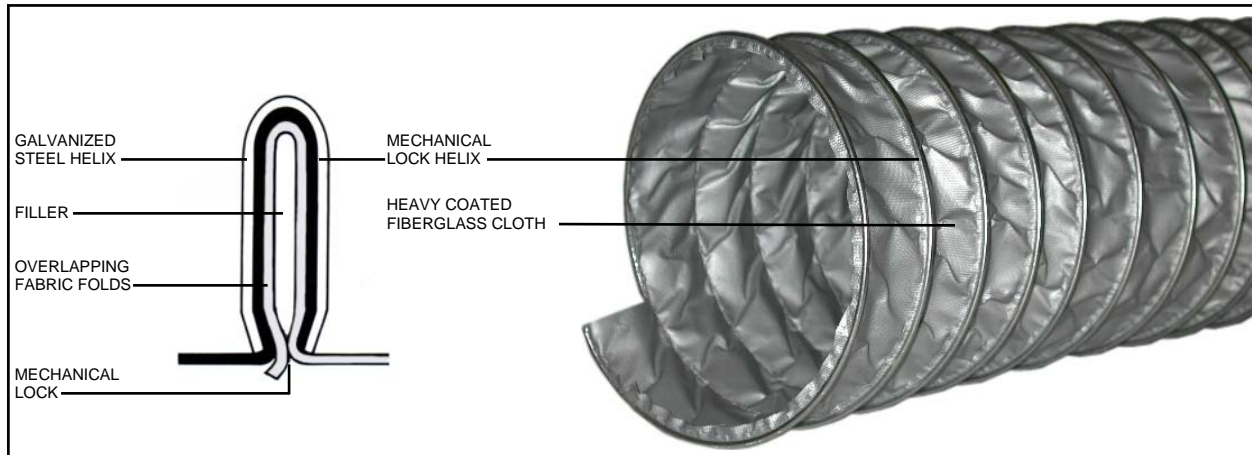

CONSTRUCTION FEATURES: Flexmaster's Type 4 is manufactured to meet the highest quality standards in strength, permeability and fire resistance required in a flexible air duct. This non-insulated, UL-181 Class 1 Air Duct is designed for application in a low to high pressure HVAC air distribution system.

DUCT FABRIC: A Heavy Coated Fiberglass Cloth Fabric, Mechanically Locked Without Adhesives.

HELIX: Corrosive Resistant Galvanized Steel, Formed and Mechanically Locked to Fabric. Supporting Outside Metal Helix, Retains Flexibility.

TECHNICAL DATA

Standard Lengths (Feet).....25', Special Lengths on Request	Rated Velocity (F.P.M.).....5500 F.P.M.
Inside Diameter (Inches).....3", 4", 5", 6", 7", 8", 9", 10"12", 14", 16", 18", 20", 24"	Internal Working Pressure (W.G.).....12" w.g. positive10" w.g. negative, 3" thru 12" dia.5" w.g. negative, 14" & 16" dia.1" w.g. negative, 18" dia.
Inside Bend Radius (Inches).....½ x I.D. (All Sizes)	Minimum Burst Pressure.....2½ times working pressure
Air Friction Loss.....See Friction Loss Chart	Operating Temperature Range.....-20° to +250° F
Vapor Barrier Permeance......02 Perm per A.S.T.M.E96, Procedure A	Flame Spread.....Less than 25
UL Listing.....UL 181, Class 1 Air Duct	Smoke Developed.....Less than 50
Standards, Codes.....NFPA 90A AND 90B, BOCA, ICBO, SBBCHUD/FHA MIN. Property Std.	

To maintain Buckley's policy of continuous improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation. **Manufactured by Sheet Metal Union Local 17.**

MANUFACTURED BY: Buckley Associates, Inc. HANOVER, MA

Visit us on the World Wide Web at: <http://www.buckleyonline.com>

