

SUBMITTAL DATA

WALK-IN ACCESS DOOR

Model WIAD



Standard features:

- **Frame** - .060 aluminum extrusion
- **Door panel frame** - .060 aluminum extrusion
- **Door panel** - 24 gauge galvanized steel
- **Handles** - 2 per door - 3/8" shaft shipped loose work from both inside & outside
- **Hinge** - aluminum continuous type
- **Gasket** - closed cell foam
- **Insulation** - 1" thick Fiberglas
- **Flange** - 1 1/4" wide

Options:

- Extra handles
- Locking handles
- Aluminum door panels
- Heavier gauge door panels
- Plexiglas port (8 x 8)
(designate right or left hinged when facing outside of door on Port Doors **Model WIAD-P**).

Rated for up to 4.5" static pressure when properly installed.

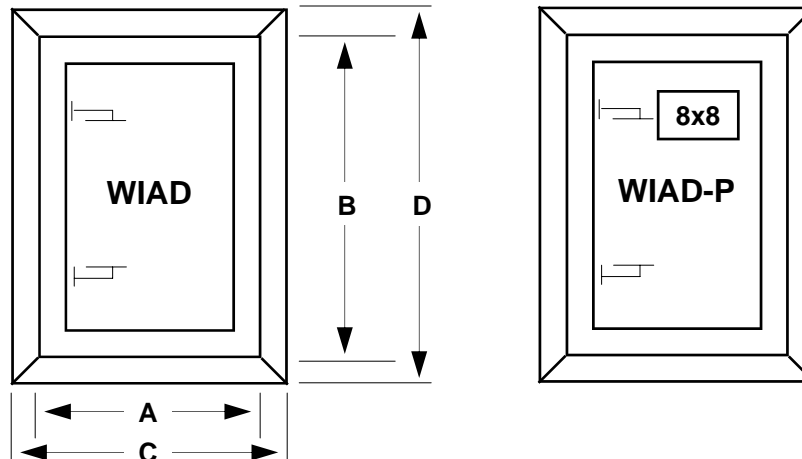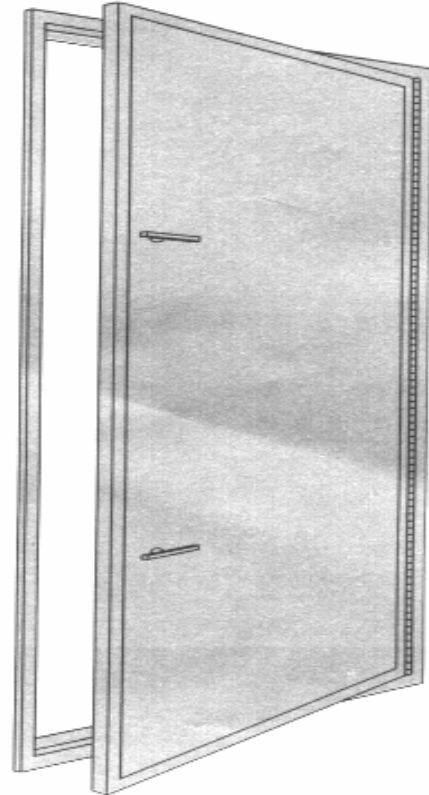

To maintain Buckley's policy of continuous improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation. **Manufactured by Sheet Metal Union Local 17.**

MANUFACTURED BY: Buckley Associates, Inc. HANOVER, MA

Visit us on the World Wide Web at: <http://www.buckleyonline.com>

