


SUBMITTAL DATA

BUCKLEY ACOUSTIC ROOF CURB

MODEL ARC-PFC

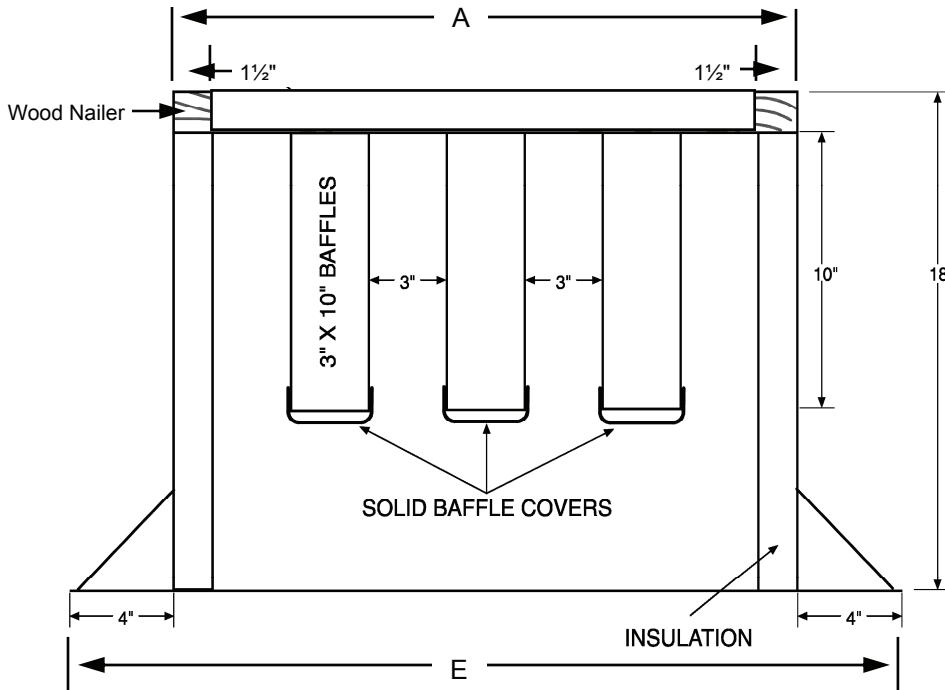

Note

To minimize pressure drop and maximize low frequency acoustical performance, free area should be 55-60%. Typical noise reduction is 50%.

Standard Construction

- 18 Gauge Galvanized Steel
- 18" Standard Height
- Wood Nailer
- 3" X 10" Baffles
- 3" Typical Baffle Spacing
- 1", 3 lb. Density Fiberglass Insulation
- Riveted and Tabbed on Corners and Sides

Options

- Aluminum Construction .063
- Pressure Treated Wood Nailer

Dimensional Data

| CURB SIZE | OPT. TRAY SIZE* | FAN CURB CAP. DIM | A | E | R.O.* SQ. |
|-----------|-----------------|-------------------|-----|-----|-----------|
| 17 | 8 | 17 | 15½ | 23½ | 10½ |
| 19 | 8 | 19 | 17½ | 25½ | 10½ |
| 22 | 12 | 22 | 20½ | 28½ | 14½ |
| 24 | 14 | 24 | 22½ | 30½ | 16½ |
| 26 | 16 | 26 | 24½ | 32½ | 18½ |
| 30 | 18 | 30 | 28½ | 36½ | 20½ |
| 34 | 24 | 34 | 32½ | 40½ | 26½ |
| 40 | 30 | 40 | 38½ | 46½ | 32½ |
| 46 | 36 | 46 | 44½ | 52½ | 38½ |

Note: All dimensions are in units of inches.
*R.O. (Roof Opening)

To maintain Buckley's policy of continuous improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation. **Manufactured by Sheet Metal Union Local 17.**

MANUFACTURED BY: Buckley Associates, Inc. HANOVER, MA

