



520D Louvered Steel Supply Register - 3/4" Blade Spacing, Double Deflection

Core Style:


Double Deflection






Fastening:

A: Countersunk Screwholes with Screw



Border: F

1 1/4" (32) Flat Frame

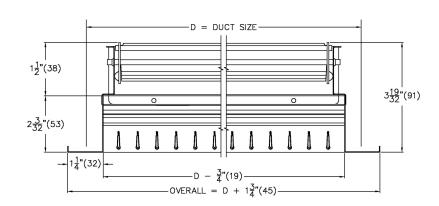

Material:

Steel

Finish:

B12 - Standard White

Notes:

- Front blades parallel to Short dimension
- Individually adjustable roll formed blades on 3/4" (19) centers
- VCS3 opposed blade damper, coated steel
- Factory tolerance ± 1/32" (1)

PROJECT: SUBMITTAL NO: 258306 SUBMITTAL DATE: 6/24/2020 ENGINEER: CUSTOMER:

DESCRIPTION: Louvered Steel Dbl Deflec Reg W/Damp, 3/4" Spacing

520D//I/10.000/10.000/F/S////A/SW/B12