

Submittal Data




Model 150B Buckley 1.5 HR Rated Static Fire Damper

Application

Model 150B is a static rated fire damper approved for use in walls and is a 2 hour fire partition. This model carries a 1.5 hour UL fire damper label. UL555 classifies static rated fire dampers for use in HVAC systems that are automatically shut down in the event of a fire.

Standard Construction

- + 22 Gauge Galvanized Steel Blades and Frame
- + Blades Out of Air Stream
- + 165° F Replacable Fusible Link
- + Horizontal or Vertical Mount
- + Horizontal mount constructed with negator closure springs
- + UL555 Fire Resistant Rating 1.5 Hours Listing R13317

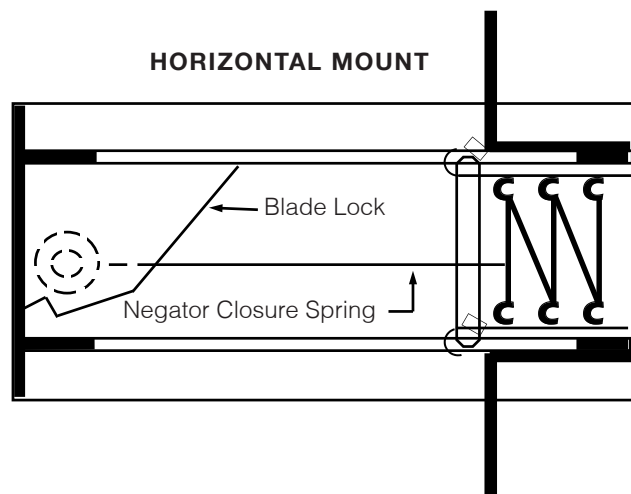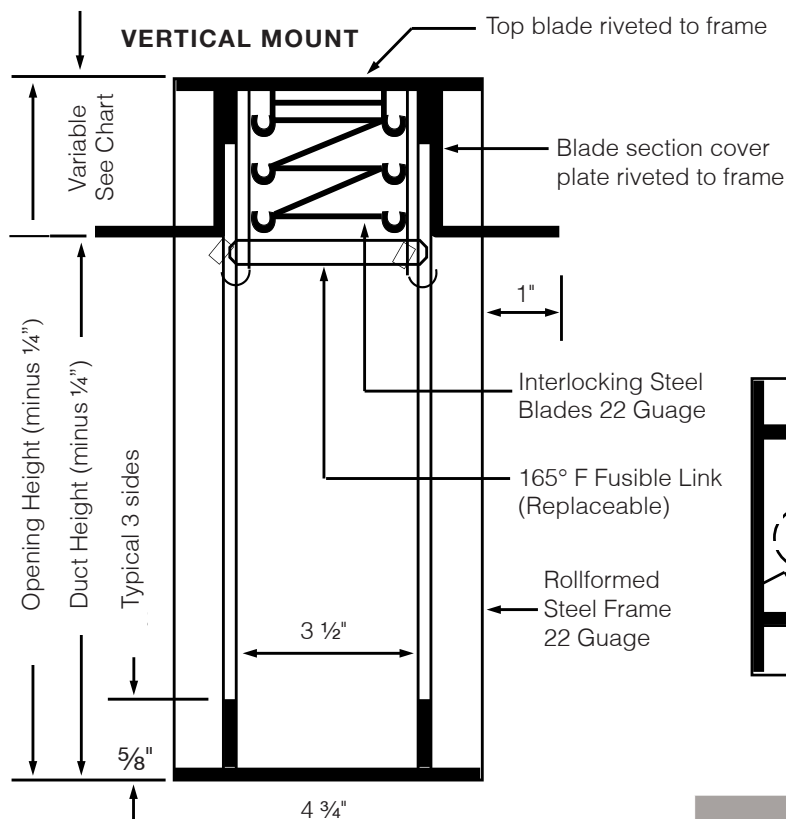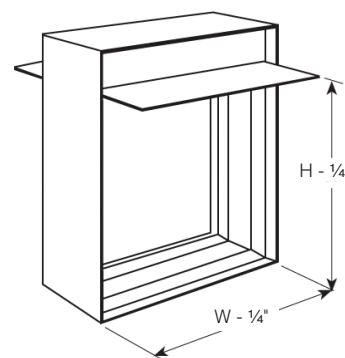

Underwriters laboratories classifies for use in 2 hour fire partitions.

For multiple assembly sizes consult U.L. Listing Card or U.L. Fire Resistance Index.

	Single Section Size Availability			
	Vertical		Horizontal	
	Width × Height		Width × Height	
Minimum Section	4"	4"	4"	4"
Maximum Section	60"	60"	48"	43"

Buckley Associates, Inc.

Manufactured by Buckley Associates, Inc, Hanover, Massachusetts
Sheet Metal Union Local 17.



150B (97465)
May 2019

