


SUBMITTAL DATA

BUCKLEY ACOUSTIC ROOF CURB

MODEL ARC-200

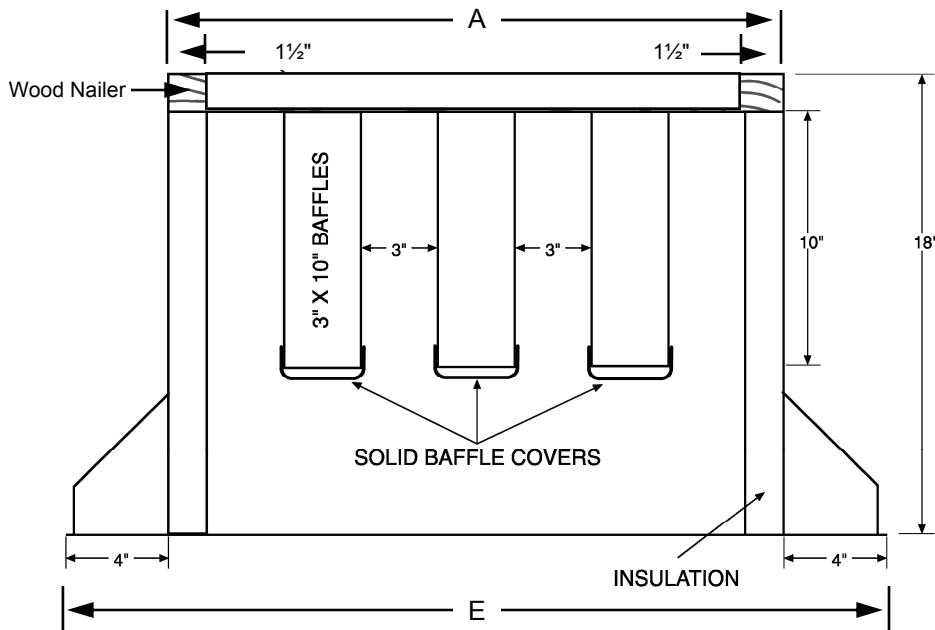

Note

To minimize pressure drop and maximize low frequency acoustical performance, free area should be 55-60%. Typical noise reduction is 50%.

Standard Construction

- 18 Gauge Galvanized Steel
- 18" Standard Height
- Wood Nailer
- 3" x 10" Baffles
- 3" Typical Baffle Spacing
- 1", 3 lb. Density Fiberglass Insulation
- Fully Welded

Options

- Aluminum Construction .063
- Pressure Treated Wood Nailer

Dimensional Data

CURB SIZE	OPT. TRAY SIZE	FAN CURB CAP	A	E	R.O.* SQ.
17	8	17	16	24	10½
19	10	19	18	26	12½
22	12	22	21	29	14½
24	14	24	23	31	16½
26	16	26	25	33	18½
30	18	30	29	37	20½
34	24	34	33	41	26½
40	30	40	39	47	32½
46	36	46	45	53	38½

Note: All dimension are in units of inches.
*R.O. (Roof Opening).

To maintain Buckley's policy of continuous improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation. **Manufactured by Sheet Metal Union Local 17.**

MANUFACTURED BY: Buckley Associates, Inc. HANOVER, MA