


Lighted Bathroom Exhaust Fan, Product # SP-AP0511WL, 30-110 CFM



Model SP-AP features a virtually silent electronically commutated (EC) motor with three built-in, high-speed airflow settings (50, 80 or 110 cfm) and an integrated nightlight. Humidity and CO2 plug and play sensors are also available accessories for this model.

- ENERGY STAR rated
- Virtually silent EC motor with 3 high speeds (50-80-110 CFM)
- Constant CFM technology
- Integral nightlight
- Plug and play sensors available
- Universal 4", 5" or 6" duct connector
- Easy installation bracket
- Two speed capable with integral time delay

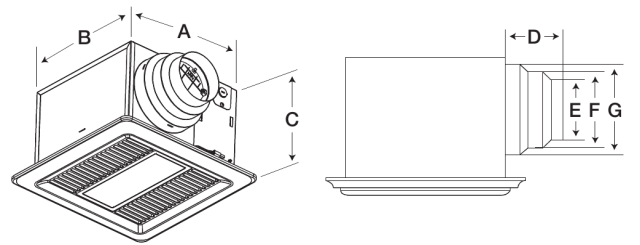


A	B	C	D	E	F	G
10.25 in	10.375 in	7.375 in	3.75 in	3.875 in	4.875 in	5.875 in

Certifications

ETL
Home Ventilating Institute (HVI)

Performance Characteristics

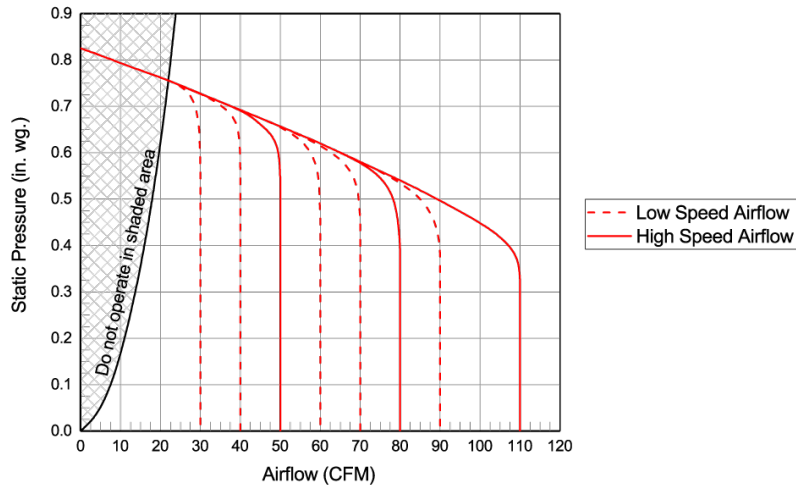

Construction Features

Drive Type	Direct Drive
Impeller Type	Centrifugal Wheel
Impeller Material	Polypropylene
Includes	Backdraft damper Mounting brackets
Certifications	ETL Home Ventilating Institute (HVI)
Speed Controllable	Yes

Motor Information

Voltage	115
---------	-----

Motor Included Yes

Air and Sound Performance

Watts	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.1	0.125	0.25	0.375	0.5	0.625
				CFM	Sones	CFM	Sones	CFM	Sones	CFM
16.3	819	819	CFM	50	50	50	50	50	50	50
			Sones	<0.3	<0.3	<0.3	1	2	3	3
17	861	861	CFM	80	80	80	80	80	80	55
			Sones	<0.3	<0.3	<0.3	0.9	1.5	2.5	3.5
20.4	934	934	CFM	110	110	110	110	110	77	55
			Sones	0.5	0.7	0.7	1.2	2	2.5	3.5

California Residents

 **WARNING**

This product can expose you to chemicals including cadmium used in the processing of corrosion resistant metal and fasteners, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov